



DC ELECTRIC SCISSOR LIFTS

Conventional Series • SJIII 4626 • SJIII 4632



2YEAR GOLD LEAF PROTECTION PROGRAM

The Conventional Series DC Electric Scissor Lifts offer high capacity and large platform areas, making them suitable for any on-slab application. Featuring variable speed rear wheel hydraulic drive, the Conventional Series offers working heights up to 11.9 m and up to 30% gradeability. A standard 1.2 m roll out extension deck can be secured in multiple positions, and both models can be driven at full height.

- Up to 9.8 m raised platform height
- Up to 454 kg capacity
- 1.2 m overall width
- 2.3 m overall length
- 1.1 x 2.1 m platform size (Inside)
- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- 0.9 m roll out extension deck
- Up to 30% gradeability
- Relay based control system with color coded and numbered wiring system

DC ELECTRIC SCISSOR LIFTS Conventional Series

| Specifications | SJIII 4626 | SJIII 4632 |
|--------------------------------------|-------------|-------------|
| A Work Height | 9.9 m | 11.8 m |
| B Raised Platform Height | 7.9 m | 9.8 m |
| C Lowered Platform Height | 1.1 m | 1.2 m |
| D Overall Width | 1.2 m | 1.2 m |
| E Overall Length | 2.3 m | 2.3 m |
| F Stowed Height (Rails Up) | 2.2 m | 2.2 m |
| G Stowed Height (Rails Down) | 1.8 m | 1.9 m |
| H Platform Width (Inside Dimension) | 1.1 m | 1.1 m |
| I Platform Length (Inside Dimension) | 2.1 m | 2.1 m |
| Extension Deck (Roll Out) | 1.2 m | 1.2 m |
| Ground Clearance (Stowed) | 8.9 cm | 8.9 cm |
| Ground Clearance (raised) | 1.9 cm | 1.9 cm |
| Wheelbase | 1.8 m | 1.8 m |
| Weight | 2170 kg | 2300 kg |
| Gradeability | 30% | 25% |
| Turning Radius (Inside) | 1.2 m | 1.2 m |
| Turning Radius (Outside) | 2.4 m | 2.4 m |
| Lift Time (With Rated Load) | 54 sec | 59 sec |
| Drive Speed (Stowed) | 3.2 km/h | 3.2 km/h |
| Drive Speed (Raised) | 1.0 km/h | 1.0 km/h |
| Maximum Drive Height | Full Height | Full Height |
| Capacity (Overall) | 454 kg | 317 kg |
| Maximum # of Persons | 3 | 2 |


STANDARD FEATURES

- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- Wet disc SAHR brakes
- Proportional controls for drive & lift functions
- 1.2 m roll out extension deck
- 24V DC power source
- Low voltage battery protection
- Up to 30% gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Overload sensing system
- Lowering warning system
- Lanyard attachment points
- Operator horn
- Half height spring hinged gate
- Hinged railing system
- Forklift pockets and tie down/lift lugs
- Analog control system
- Colour coded and numbered wiring system

OPTIONS†

- Flashing light
- Dual flashing lights
- Shop airline to platform
- 250 Ah batteries
- Full height spring hinged gate

† Capacities, and machine weights may differ when options are added

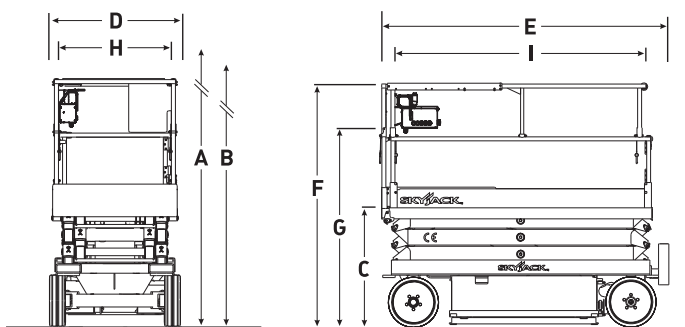

Skyjack Australia Pty Ltd
 4 Coates Place
 Wetherill Park
 New South Wales, 2164
 Tel: +61 (0) 2878 63200
 Fax: +61 (0) 2878 63222
 Email: jcranmer@skyjack.com

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.